
Left and right rotating perforated tape cutter

TR-121LXZ

Fast and accurate | Flat section | Quality assurance

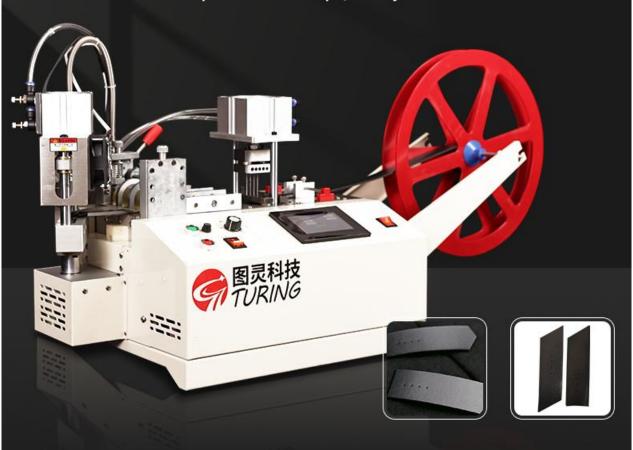

Craftsmanship

Build high quality machines



STRENGTH MANUFACTURERS



AFTER-SALES SERVICE



SUPPORT CUSTOMIZATION





DURABLE



REAL MATERIAL

Sample effect

Precision craftsmanship · Excellent quality



Scope of application: belts, velcro, webbing, plastic hoses, computer wiring, etc.



Product Parameter

Equipment name	Left and right rotating perforated tape cutter		
Machine size	650X450X550mm	interfaces	touchscreens
blade width	105mm	weights	35kg
cutter	High-speed steel electric heating tube heating, single electric heating tube		
electrical machinery	The cutter is an AC asynchronous motor with step feed.		
perforation	Hole punching for cylinder control, easy to replace, can be customised for cooling holes, hot holes, single holes, up to 5 holes, 5 holes can be punched synchronously at the same time.		
input voltage	220V 50HZ	pneumatic	0.6kp
Rotary Overfeed Width	Maximum width of 70mm at 45 degrees		
functionality	Multi-angle rotary cutting, cold and hot cutting, rotary slant cutting and punching can be completed at one time; Perforation mould can be freely replaced, hole size can be selected to customise.		

Product Details

Good quality, look at the details



control panel

Adopting micro-computer operation panel makes the operation of the machine easier and more convenient. Chinese and English languages can be switched.

knife blade

Sharp, abrasion-resistant blades for longer wear cycles and greater durability. Rotary cutter with 6 cutting shapes to choose from.





waste tray

Waste storage at the bottom of the perforated area. Convenient for post-hygienic cleaning


Cylinder controlled punching

The number of holes and the distance between holes can be set, simple and easy to operate.



...

Product Structure Diagram

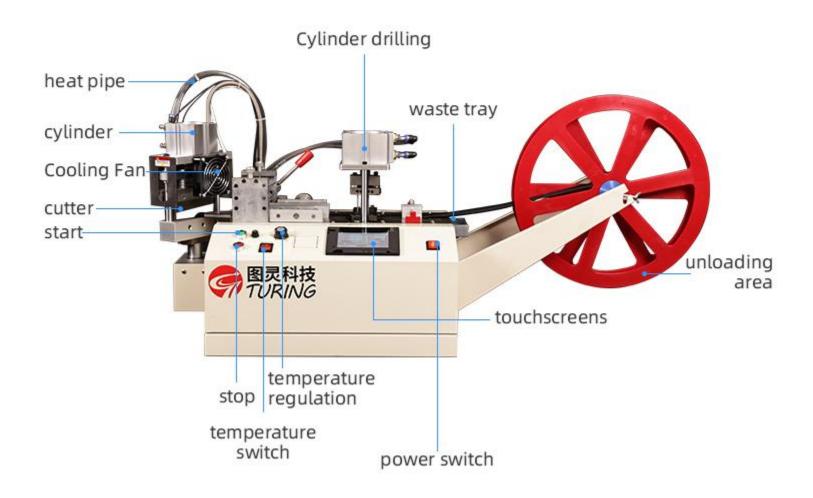

Product Display





